


Label: ~~Plating, back of spoke area~~ Middle of Barrel 545
 kV:20.0 Tilt:0.0 Take-off:22.4 Det Type:SUTW+ Res:139 Tc:17
 FS : 1758 Lsec : 87 29-Oct-2004 14:19:09

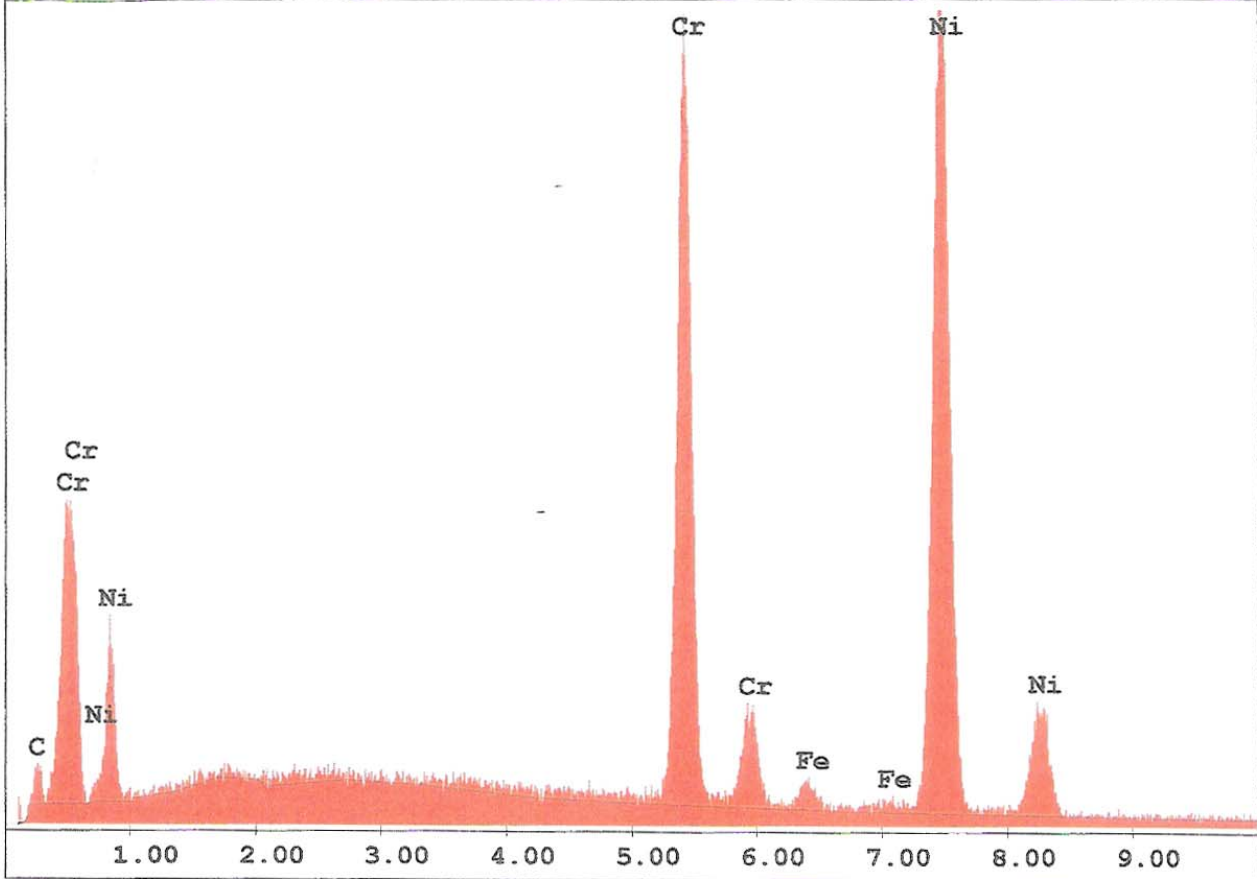

EDAX ZAF Quantification (Standardless)

Element Normalized

SEC Table : Default

Element	Wt %	At %	K-Ratio	Z	A	F
C K	7.89	28.76	0.0144	1.1544	0.1581	1.0003
CrK	26.08	21.96	0.2653	0.9694	0.9804	1.0704
FeK	1.43	1.12	0.0145	0.9714	0.9340	1.1153
NiK	64.59	48.16	0.6138	0.9883	0.9615	1.0000
Total	100.00	100.00				

Element	Net Inte.	Bkgd Inte.	Inte. Error	P/B
C K	5.71	4.12	7.00	1.39
CrK	207.48	7.41	0.77	28.02
FeK	8.47	6.25	5.78	1.36
NiK	255.69	5.25	0.68	48.67